

# Rotary-tilting motorized holder

---

2-1.272

## DESCRIPTION

Universal, motorized rotary tool, facilitating precise, axial mounting of the workpiece with tilting capability.

## TECHNICAL DATA

Three-jaw chuck  $\varnothing$  125 mm DIN6350


Ability to reverse jaws for increased clamping diameter

Full tilt adjustment of the chuck in the range of 0-90°

Chuck lock at 0° angle

Dimensions: Height 230 mm x Width 212 mm x Length 242 mm

Weight: 12 kg

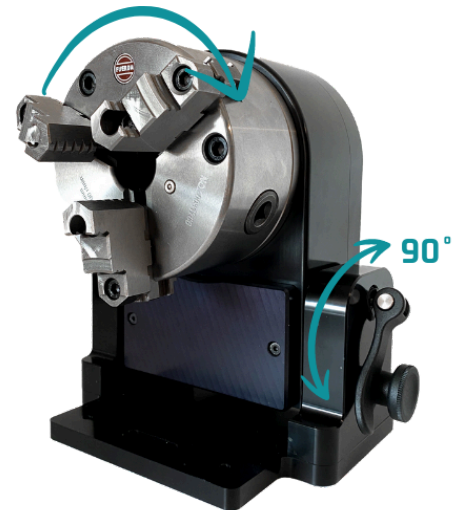

## VARIANTS

-

## OPTIONAL ADDITIONAL COMPONENTS (Not included in the set)

-

## APPLICATION

HTS/ECO laser welders

FLEX laser engravers

## SPARE PARTS

-

## PACKAGE CONTENTS

Motorized tilting and rotating chuck, key for three-jaw chuck, 3-meter connection cable, user manual.


## WARRANTY CONDITIONS

12 months from the date of purchase.

The warranty does not cover consumable parts such as bearings.

# Rotary-tilting motorized holder

## TECHNICAL DATA

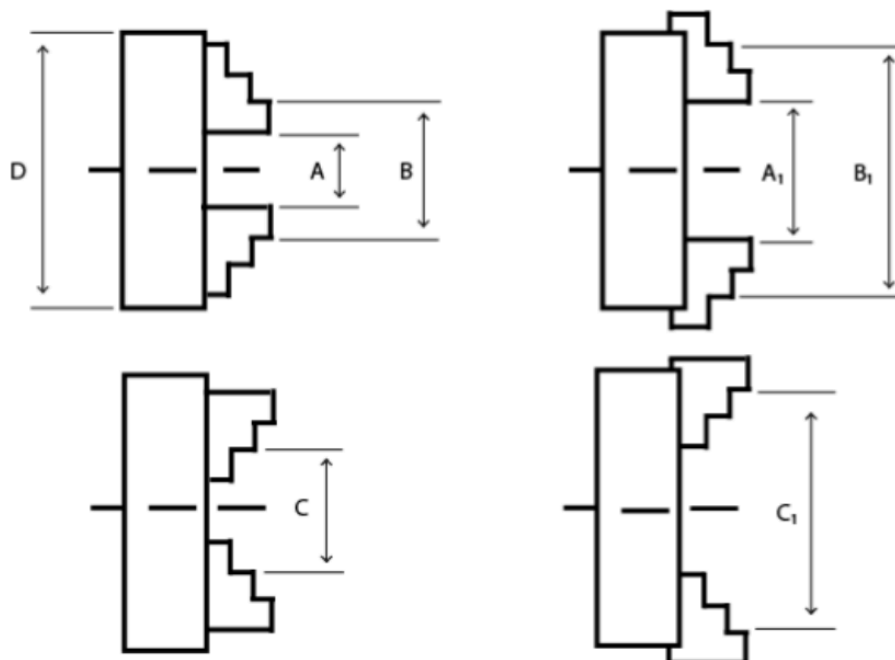

Handle dimension	Inward jaws		Outwards jaws
	Jaw range		Clamping range
	A-A1	B-B1	C-C1
125	2,5-40	38-125	38-110